

Short X [L, L, H, H, H, H]

Model : EHS1T201C



EAHISON

ELECTRICAL SPECIFICATIONS

Frequency Range (MHz)	R1/R2	Y1/Y2/Y3/Y4
	690-960	1710-2690
Polarization	$\pm 45^\circ$	
Gain over all tilts (dBi)	≥ 13.5	≥ 17
Horizontal 3dB beam width($^\circ$)	65	65
Vertical 3dB beam width($^\circ$)	$\leq 15 \pm 1$	$\leq 7 \pm 1$
Front to back ratio(dB)	≥ 25	≥ 25
Cross polar ratio(0°)(dB)	≥ 15	≥ 15
Upper side lobe suppression (dB)	≥ 15	≥ 15
Electrical Downtilt ($^\circ$)	2-14	2-12
Electrical Downtilt accuracy ($^\circ$)	± 1	
Ports VSWR	≤ 1.5	
Isolation: intra-system (dB)	≥ 25	
Isolation: inter-system (dB)	≥ 25	
Intermodulation IM3 ($2 \times 43\text{dBm}$)	$\leq -153\text{dBc}$	
Impedance (Ω)	50	
Max Input Power (W)	1200	

MECHANICAL SPECIFICATIONS


Connector(s)	12 $\times$ 4.3-10 female
Connector position	Bottom
Antenna Dimensions (mm)	1550 $\times$ 500 $\times$ 158
Packing Dimensions (mm)	/
Mechanical Downtilt kits ($^\circ$)	0-12
Radome Color	light gray
Radome Material	Fiberglass
Antenna weight (kg)	≤ 32
Packing weight (kg)	/
Wind load (N,at 150km/h) Frontal/Lateral/Rearside	/
Operating temperature ($^\circ\text{C}$)	-40 $\sim$ +60
Maximum Wind Speed(km/h)	200
Mounting Pipe Diameter (mm)	$\Phi 50 \sim \Phi 115$
RET type	Replaceable Integrated RET

Short X [L,L,H,H,H,H]


Model: EHS1T201C



EAHISON

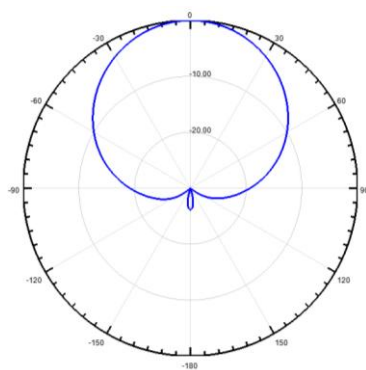

H Pattern

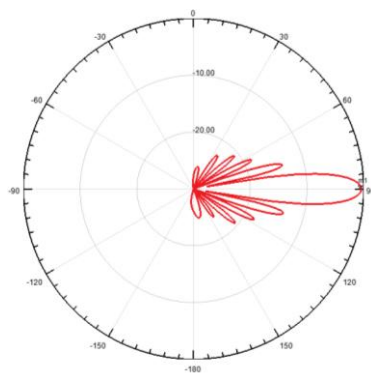

E Pattern

